


DIMENSIONAL DATA

2½" Threaded Top Opening Vessels

SANTEK®

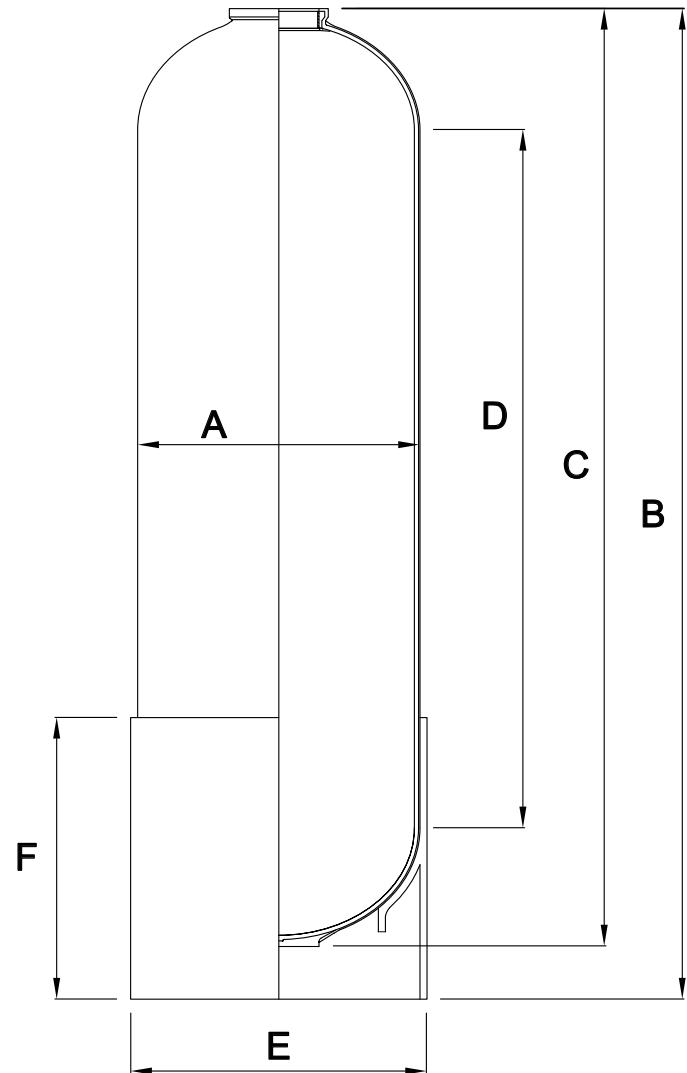

| | Vessel Dia. A mm | Total Height B mm | Vessel Height C mm | Cylindrical Height D mm | Base Dia. E mm | Base Height F mm | Vessel Volume l | Total Weight kg |
|-----------|------------------------|-------------------------|--------------------------|-------------------------------|----------------------|------------------------|--------------------|--------------------|
| TO2 7x35 | Ø 193 | 894 | 880 | 680 | Ø 204 | 128 | 22 | 4,2 |
| TO2 8x17 | Ø 214 | 442 | 425 | 195 | Ø 222 | 152 | 11 | 2,5 |
| TO2 8x35 | Ø 214 | 898 | 885 | 640 | Ø 222 | 152 | 26 | 4,3 |
| TO2 8x44 | Ø 214 | 1114 | 1097 | 880 | Ø 222 | 152 | 33 | 5,2 |
| TO2 9x35 | Ø 234 | 896 | 885 | 640 | Ø 238 | 160 | 30 | 5,5 |
| TO2 10x35 | Ø 257 | 896 | 890 | 610 | Ø 262 | 160 | 38 | 5,5 |
| TO2 10x54 | Ø 260 | 1372 | 1368 | 1100 | Ø 262 | 160 | 62 | 7,3 |
| TO2 13x54 | Ø 334 | 1391 | 1368 | 1025 | Ø 345 | 198 | 111 | 11,7 |

Operating Pressure : 0 - 10 bar

Operating Temperature : 1 - 65 °C